

JUNTATEC

Mortar for sealing joints of 0 to 16 mm. Resistant to chemical aggression and very resistant to high temperatures. Ideal for SWIMMING POOLS.

Preparing the joints:

- ◆ Make diagonal passes on the joints so that the **FIX-SPATULA** does not collide with the sides of the tiles.
- ◆ The ambient temperature must be between +5°C and +30°C.
- ◆ Allow 24 hours between laying the tiles and grouting.
- ◆ In summer, when it is very hot, the joints must be wetted with water before beginning to grout.

Preparing the mixture:


- ◆ Mix 5.75 l of water with 25 kg of **JUNTATEC**, or mix 2.3 l of water with 10 kg of **JUNTATEC**.
- ◆ Mix with an electric drill and mixing attachment.
- ◆ Mixing too quickly will cause bubbles to form in the surface of the joints.
- ◆ Mixing too slowly or by hand will cause the pigment which colours the paste to be badly distributed and the joint may discolour in the future.
- ◆ Mix well and allow the mixture to stand for 2 minutes.
- ◆ Then re-mix with the electric mixer.
- ◆ The paste is now ready for application.



WARNING

JUNTATEC must not be used:

- ◆ When **MAXIMUM** resistance to acids is necessary (use **CERPOXI**).
- ◆ For anti-acid dilation joints: use **SELLAFIX**.
- ◆ Mixed with dirty water or lime (colour differences would appear in the joints).

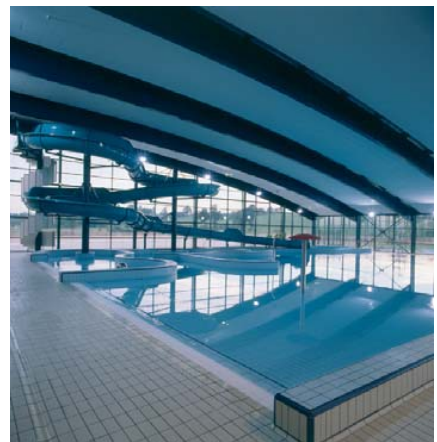

The best joint for swimming-pool structures.



Use the rubber **FIX-SPATULA**.

Applying the mix:

- ◆ Fill the joints with the **FIX-SPATULA**.
- ◆ Make diagonal passes on the joints so that the **FIX-SPATULA** does not collide with the sides of the tiles.
- ◆ As you grout, all the excess is collected by the **FIX-SPATULA**.

Cleaning:

- ◆ After 30 minutes, clean the tiles with the **FIX-SPONGE** or the **FIX-LLANA FOR CLEANING**, slightly dampened with water.
- ◆ If you use the **FIX-SPONGE**, it must NOT be wetted with water: it must only be dampened.
- ◆ The tools may be cleaned in the special **FIX-BUCKET**.
- ◆ Clean only once: further cleaning will only succeed in weakening the colour and the joint's resistance.


 Use the **FIX-BUCKET** and the **FIX-SPONGE**.

Final cleaning:

- ◆ The next day, remove the film of colour with a dry cloth.
- ◆ Nothing else need be used: neither water nor a scourer...only a dry cloth or sponge.


 Use the **FIX-TROWEL FOR CLEANING**.

Final cleaning on rough tiles:

- ◆ 7 days after grouting, remove the excess with 1 part **GRESNET** acid and 10 parts water.


 If necessary, use **GRESNET**.

CONSUMPTION:

Size (mm)	Thickness (mm)	Joint (mm)	Yield (kg/m ²)
120x240	12	8	2.40
200x200	8	6	0.96
250x250	10	20	3.2
300x300	8	6	0.64



Hydro-repellent grouting in swimming-pools.

