

# CERPOXI

**Mortar for sealing acid-resistant joints, from 0 to 10 mm.  
WATERTIGHT SEALING. LOW VISCOSITY. EASY APPLICATION**

## Prior preparation:

- ◆ The joints must be solid, free of dust, paint, waxes, oils, grease etc. The ideal application temperature is 20°C.
- ◆ When the temperature is very low and the liquids are cold and viscous, submerge the bottles in hot water (not boiling).
- ◆ When laying has been done with cemetitious adhesive, sealing must be done after 24 hours have passed.

## Preparing the mixture:

- ◆ Empty the contents of the two bottles into the bucket. Allow them to empty completely.
- ◆ Sprinkle the powder onto the liquids and mix vigorously with an electric mixer for 2 minutes.
- ◆ NEVER MAKE HALF-MIXES.

## Applying the mixture:

- ◆ Fill the joints using the **FIX-SPATULA**.
- ◆ Make diagonal passes on the joints.
- ◆ Collect excess quantities with same tool.

## Cleaning

- ◆ Cleaning is done within no more than 10 minutes after applying the **CERPOXI**. Use the **FIX-SCOURER** with the White scourer.



## ATTENTION

- ◆ **CERPOXI** are not expansion joints (use **SELLALASTIC**).
- ◆ Do not use the sealing material on tiles that are wet, dirty covered in dust etc.
- ◆ Take special care in cleaning in sealing materials without enamelling.



Anti-acid, impermeable, hygienic sealing.



Use the rubber **FIX-SPATULA**.

## CONSUMPTION:

Size (mm.)	Thickness (mm)	Joint (mm)	Yield (kg/m <sup>2</sup> )
75x150	6	4	0.80
120x240	10	8	1.60
100x200	10	6	1.50
150x300	12	10	1.90

## Instructions for use:

**FIXCER**


SEALING JOINTS



- **Triple component mortar:** Using an electric mixer, blend one large bottle, one small and one bag of powder.



- Use the special **FIX-SPATULA** trowel. Apply the product diagonally to the joints

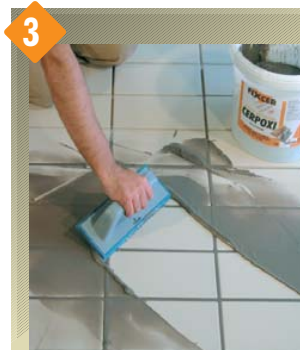

- Collect **ALL** excess quantities with the same hard rubber trowel.



- **Immediately** clean everything with water and the **FIX-SCOURER** using circular movements.



- The remaining "soup" is collected with the **FIX-SPONGE**. Clean the **FIX-SPONGE** in the **FIX-BUCKET**.



- From the next day on, remove all excess quantities with water, soap (**FIX-SABO**) and the **FIX-SCOURER**.